




GONDERFLEX INTERNATIONAL INC.

FLEXO PRINTING-CONVERTING EQUIPMENT



SLITTER INSPECTION REWINDER

13 inch GFSRE • 16 inch GFSRE

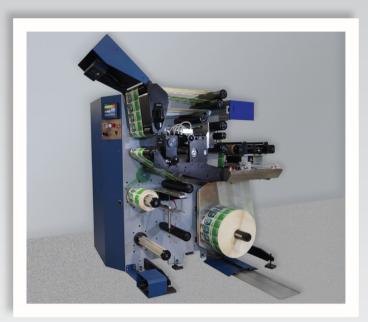

This is the ideal Slitter rewinder / inspection machine for label finishing and inspection.

Features include:


- 30" unwinder with lifting system;
- Fully automatic digital electromagnetic unwind brake assembly;
- Single 18" motorized rewinding shafts with automatic tension control;
- Adjustable rewind web gripper;
- Touch screen control panel;
- Clear material sensing electronic web guide;
- Adjustable splicing table;
- End of roll detector with auto-stop feature;
- Predetermined counter;
- Inside / outside winding;
- Choices of slitting stations include razor blades or shears knives or crush knives.


Options:

- Inspection camera from Nikka
- Automatic strobe light assembly
- Splice & flag detector
- Second rewind unit
- Waste rewind unit

GENERAL SPECIFICATIONS (GFSR)E-1600 (GFSR)E-1300

Models	(GFSR) E-1600	(GFSR) E-1300
Max. paper width	16" (406mm)	13" (330mm)
Unwind capacity	30" dia. (760mm)	30" dia. (760mm)
Rewind capacity	18" dia. (457mm) without web gripper	18" dia. (457mm) without web gripper
Max. mechanical speed	1000 ft/min. (300m/min.)	1000 ft/min. (300m/min.)
Drive	A.C. vector motor drive	A.C. vector motor drive
Control panel	Touch screen	Touch screen
Air pressure	100 PSI (7 bar)	100 PSI (7 bar)
Power requirement	400-480 V ±10%, 3ph.	400-480 V ±10%, 3ph.
Frequency	50-60 HZ	50-60 HZ
Substrate	Pressure sensitive label stock	Pressure sensitive label stock














GONDERFLEX INTERNATIONAL INC.

FLEXO PRINTING-CONVERTING EQUIPMENT

530, Guimond Boul. T Longueuil (Québec) J4G IP8 F Canada ir

Telephone: +1 450.651.2224 Fax : +1 450.651.2032 nfo@gonderflex.com



ROTOWORX